

542,051

Rec'd PCT/PTO 13 JUL 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 August 2004 (19.08.2004)


PCT

(10) International Publication Number
WO 2004/070860 A1

- (51) International Patent Classification⁷: **H01M 2/10**, 10/50
- (21) International Application Number: **PCT/IB2004/000248**
- (22) International Filing Date: 3 February 2004 (03.02.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2003-027183 4 February 2003 (04.02.2003) JP
- (71) Applicant (for all designated States except US): **TOYOTA JIDOSHA KABUSHIKI KAISHA [JP/JP]**; 1, Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): **TSUCHIYA, Takenori [JP/JP]**; c/o Toyota Jidosha Kabushiki Kaisha, 1, Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: VEHICULAR BATTERY MOUNTING STRUCTURE

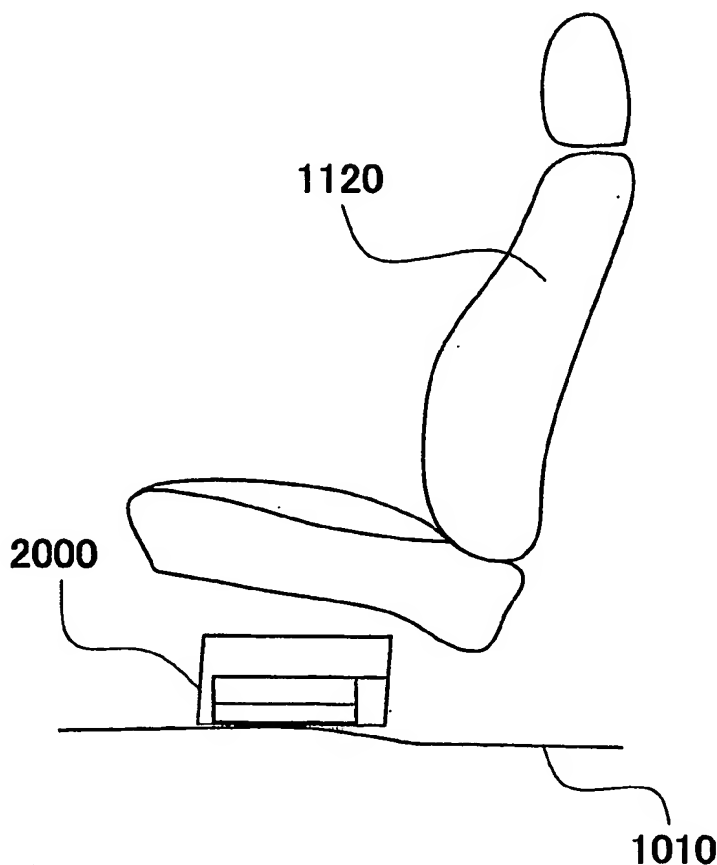

(57) Abstract: A vehicular battery mounting structure for mounting a battery pack above a floor panel while securing a simple structure of cooling passageways. This battery mounting structure is suitably adopted in a vehicle that is equipped with a first battery pack and a second battery pack that has stricter requirements regarding the temperature of the service environment. The first battery pack is mounted in an engine compartment. The second battery pack is disposed below a seat that is mounted on a floor panel as a seat for a vehicle occupant other than a driver. Specifically, a plurality of battery cells of the second battery pack are stacked in the longitudinal direction relative to the vehicle. Cooling passageways are provided between the battery cells, and conduct air supplied by a sirocco fan from a center side to an outer side in the direction of width of the vehicle.

WO 2004/070860 A1